

Elliott  
Manufacturing  
2000SL  
Automatic  
Case Packer

# 2000SL CASE PACKER

## Specifications

### Operating Speeds

Up to 30 cases per minute

### Case Range

Length 6" to 16"

Width 6" to 16"

Height 4" to 16"

### Overall Dimensions

Length 15' 10"

Width 6' 6"

Infeed Height 30"


### Electrical

230 or 480 volts, 3 Phase

60 Hz

24vdc control voltage

NEMA 12 Electrical

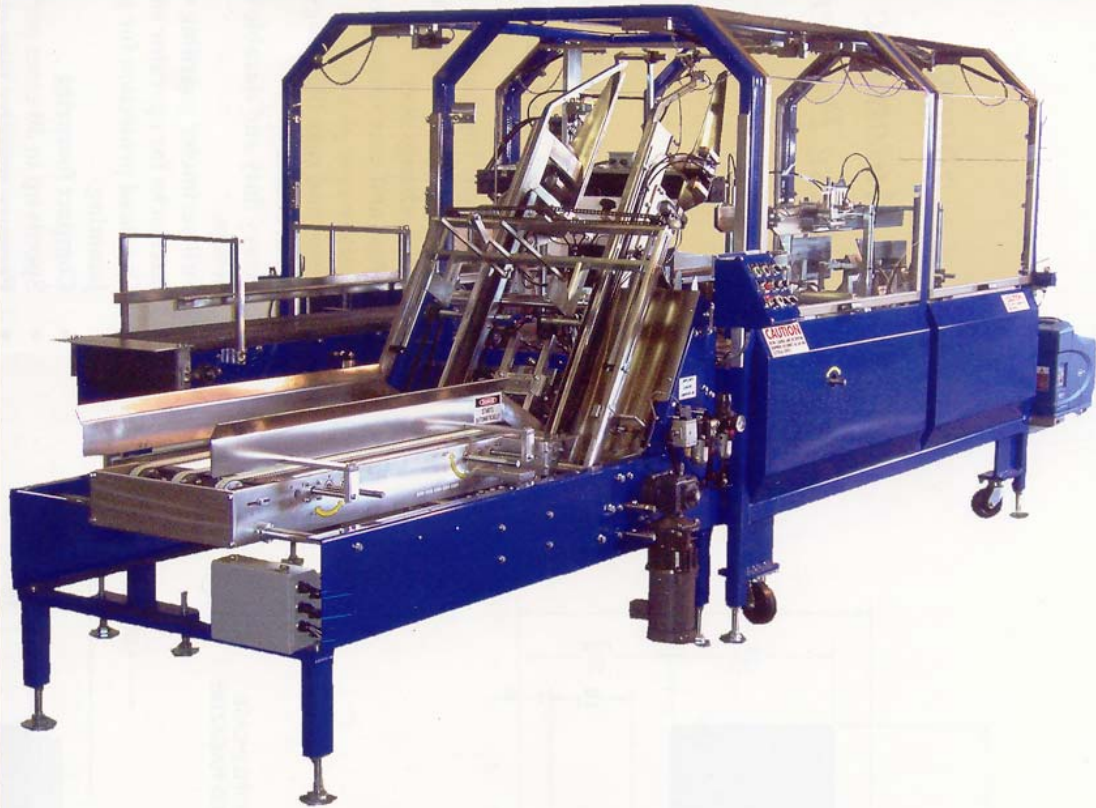

The Elliott Automatic Case Packer offers proven reliability in a compact and affordable package. The 2000SL is equipped to run End Load, Top Load, Wrap Around, Tray, and RSC style packaging applications on a wide range of products and sizes.

Our Modular designs allow for easy adjustments, quick change over, and retooling for other applications is made easy by simply changing out specific modules. Standard features of the 2000SL include a 5' powered easy load case magazine, front and rear vacuum arms for positive case opening, front and rear flights lugs to square the case through out the loading and sealing process, PLC control for control flexibility, heavy duty construction and durability for 24-7 operation, full perimeter guarding with safety interlocks for operator safety, overload protection for product jamming reducing the cost of lost or damaged product, compact footprint, and a wide case and product range with speeds up to 30 cases per minute. The sealing station can be equipped with either pressure sensitive tape or hot melt system.



*Elliott*  
MANUFACTURING

Phone# : (559) 233-6235

Fax# : (559) 233-9833

E-Mail : [info@elliott-mfg.com](mailto:info@elliott-mfg.com)

Web Site : [www.elliott-mfg.com](http://www.elliott-mfg.com)

2664 S. Cherry Ave.

Fresno, CA 93706


P.O. Box 11277

Fresno, CA 93772

# 2000SL Automatic Case Packer

## Machine Features

- 5' Powered easy load case magazine
- PLC Controls
- End Load, Top Load, Wrap Around, and RSC style cases.
- Quick change over
- Front and rear vacuum cups for positive case picking.
- Front and rear flight lugs for a square case.
- Heavy duty and durable frame design.
- Full perimeter guarding with safety interlocks for operator safety.
- Overload protection for product jamming.
- Compact footprint
- Speeds up to 30 cases per minute
- Pressure sensitive tape or hot melt sealing available.

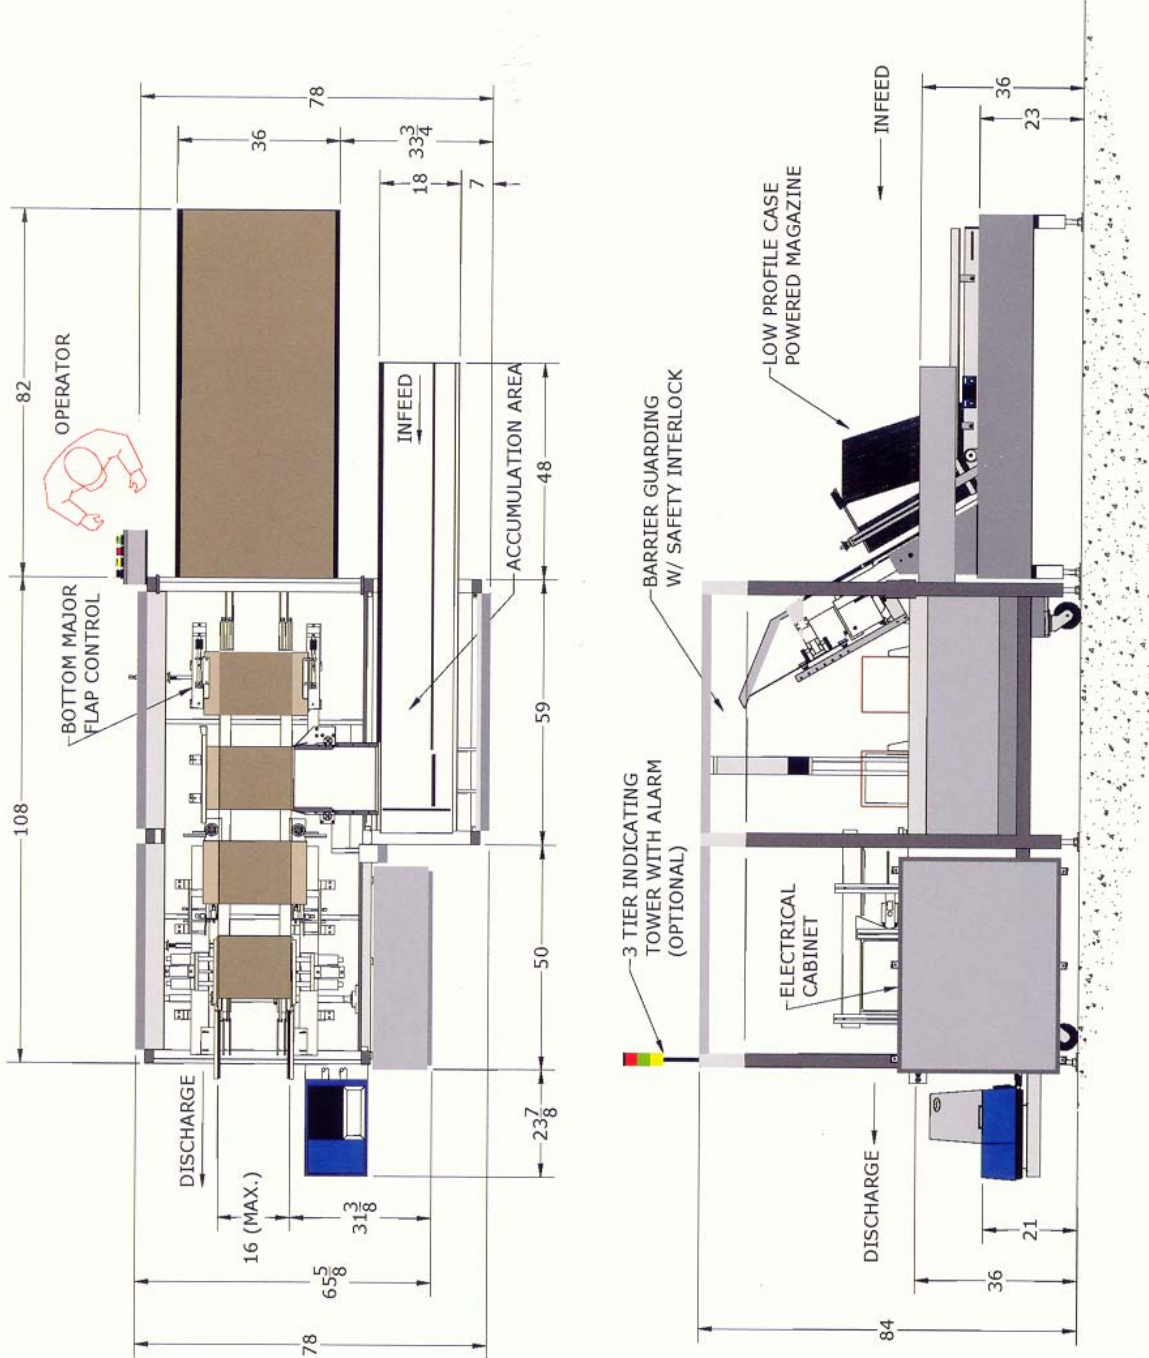

2664 S. Cherry Ave.  
Fresno, CA 93706  
P.O. Box 11277  
Fresno, CA 93772

Phone# : (559) 233-6235  
Fax # : (559) 233-9833  
E-Mail : [info@elliott-mfg.com](mailto:info@elliott-mfg.com)  
Web Site: [www.elliott-mfg.com](http://www.elliott-mfg.com)

